




PRIME ONE COAT SEALER

OUR HIGHEST QUALITY SEALER - DESIGNED TO DELIVER A DURABLE, PROFESSIONAL FINISH IN JUST ONE EASY COAT



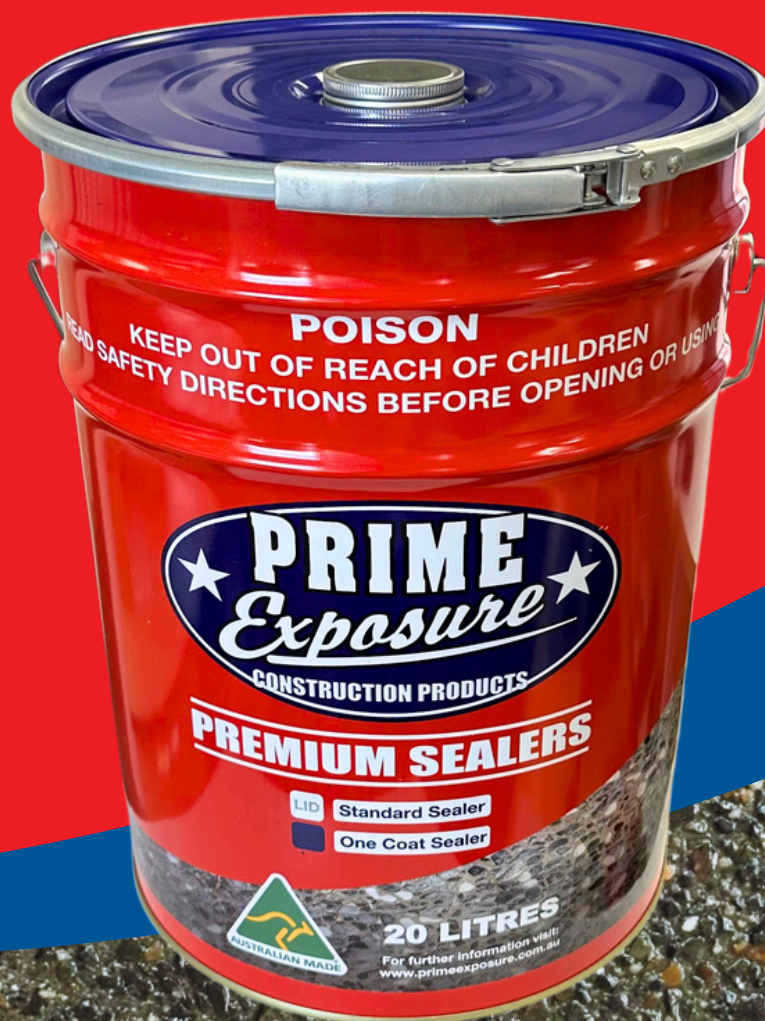

PRIME SEALER RANGE

KEY TIPS FOR APPLYING PRIME ONE COAT SEALER

Before applying Prime One Coat Sealer to exposed aggregate concrete, pressure clean the surface thoroughly. We recommend removing any loosely bound cement and efflorescence by acid etching with hydrochloric acid diluted at approximately nine-parts water to one-part acid. Do not allow the acid to dry on the surface during this process, thoroughly rinse the surface with fresh water. Ensure the concrete surface is completely dry and free from any contaminants such as grease, oil, or dirt. The presence of moisture can cause the sealer to appear white or cloudy, reduce surface adhesion, and result in delamination. Always test Prime One Coat Sealer on a small, inconspicuous area first to confirm surface compatibility and ensure it delivers the desired finish.

Application:

- Ensure that the surface to be sealed is moisture free.
- Prime One Coat Sealer is a ready-to-use product and should be applied undiluted on exposed aggregate concrete.
- Apply in a single, even coat only - a second coat is unnecessary.
- Do not allow the product to pool - excessive application can cause blistering or bubbling.
- Prime One Coat Sealer can be used on other concrete surfaces however, it may require dilution with Prime Xylene Blend depending on porosity. A test patch should be used to confirm penetration.

Recommended Application Tools:

- Use a Prime 10-20 mm nap roller for smooth or low-porosity surfaces.
- Use a Prime 25mm nap roller for rough or porous surfaces such as exposed aggregate.

Areas may become slippery when sealed, consult your Prime Exposure stockist about using our Anti-Slip (glass beads).

Important: Allow the sealed surface to cure thoroughly. Do not drive on the surface for 5-7 days to ensure full resin hardening.

PRIME EXPOSURE SEALERS



PRIME ONE COAT SEALER

Prime Exposure One Coat Sealer has been specifically designed to save time and money whilst delivering the same results as a two coat process.



PRIME SAME DAY SEALER

Prime Same Day Sealer is ready to use and can be applied directly to green curing concrete. It retains a wet/semi-gloss appearance. The perfect sealer to keep your project on the move.



PRIME STANDARD SEALER

Prime Exposure Standard Sealer will enhance the colour of your decorative concrete, designed for enduring performance and timeless appeal.



PRIME ULTIMATE COVERAGE

Prime Exposure Ultimate Coverage addresses both the practical considerations and performance requirements of a job. Experience the convenience, efficiency, and outstanding quality of Ultimate Coverage. This product is an general purpose sealer that will transform your concrete project into a resilient and visually stunning masterpiece.



PRIME COLOURED SEALER

Prime Exposure Coloured Sealers will transform the look of your new or existing concrete or most masonry surfaces and keep it looking like new for years.



**OUR PRIME SEALER RANGE IS PROUDLY
MADE AND TESTED IN AUSTRALIA,
FOR AUSTRALIAN CONDITIONS**

PLEASE NOTE: This brochure is intended as a general guide only. Surface suitability and application instructions should be carefully assessed and confirmed prior to use. Prime Exposure accepts no liability for any loss or damage resulting from improper use, inadequate preparation, or reliance on outdated or incomplete information. See SDS or TDS for full safety, handling, and product application information.



WWW.PRIMEEXPOSURE.COM.AU



ADMIN@PRIMEEXPOSURE.COM.AU